

L5034G4 *Compost Spreader*



NEW LEADER

Building the best since 1939.

**Feedlot Manure, Waste Water Sludge, Industrial Waste, Paper Mill Waste,
Compost, Marl, Poultry Litter, Fly Ash, Sludge**

**Your compost
spreading solution.**


L5034G4

NEW LEADER.

the most consistent and accurate application of material

- Higher payload capacity and greater material output.
- Precise record-keeping of environmental material applications.
- Get the job done more accurately in less time.

The New Leader L5034G4 is the best built and most versatile compost spreader in the industry. Its superior features allow you to cover more ground in less time - while maintaining an accurate spread pattern - to make your business more profitable than ever.

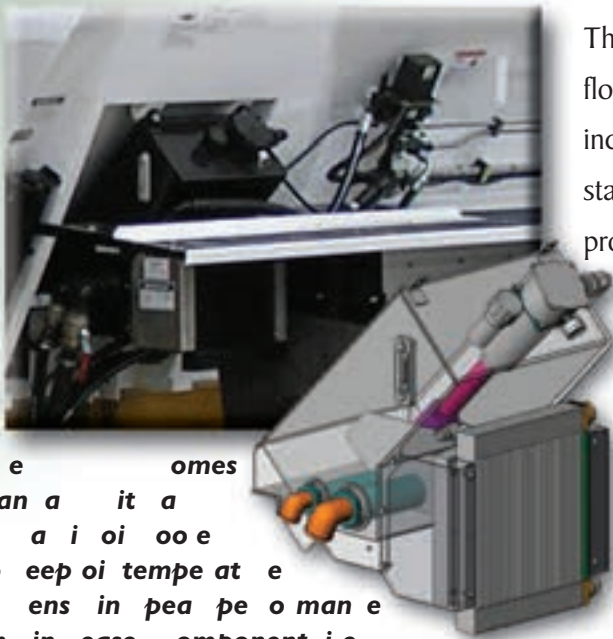

The extra wide 34" (86cm) conveyor and 50° side slopes provide better flow of material and increased output, and the 118" (300cm) wide body increases payload capacity for heavy spreading needs. The non-corrosive stainless steel conveyor floor prevents material build-up under the conveyor, providing longer service life to the overall conveyor system.

The L5034G4 also features dual 30" (76cm) spinners and tandem hydraulic pumps to broadcast material faster and farther, and minimize time in the field. Compared to the average compost spreader, spinner power is increased by up to 50% and application rates are increased up to 33% or more.



the most accurate application of material

the most consistent and accurate application of material

Get the job done more accurately and in less time.

L5034G4 Compost Spreader

Features:	Benefits:
34" (86cm) wide conveyor	More output; better flow of material.
118" (300cm) wide body	Increased payload capacity.
50° side slopes	Smooth product output with less material bridging.
Large 30" (76cm) spinners	Spreads material faster and farther, minimizing time in the field.
Tandem hydraulic pumps	Increased spinner power up to 50% and application rates up to 33%.
#1 chain with .5" X 1.5" (1cm x 4cm) crossbars (standard) #2 & #3 conveyor chain (optional)	Moves material through the box quickly to ensure consistent application.
Stainless steel conveyor floor	Non-corrosive and reduces friction, allowing product to flow smoothly; prevents material buildup to eliminate premature conveyor failure.
Straight rear endgate set farther into the body	Prevents free flow of material when loading hopper and when conveyor is stopped.
Hydraulically-controlled feedgate	Adjust the feedgate from the comfort of the cab.
Feedgate sight gauge	Monitor the feedgate opening from the cab.
NL 7™ controller (optional)	Easy-to-operate spreader control allows you to change application rates on-the-go. Creates application reports (PDF file) for accurate record keeping. No back office software needed.




The NL 7 features the SmartReport application reporting function.


L5034G4 Specifications

Dimensions and Capacities

BODY LENGTH A	OVERALL B	FRAME C	OUTSIDE WIDTH	SPREADER HEIGHT	STRUCK CAPACITY Cubic Yds. (Cu. M.) Cu. Ft.	APPROX. WEIGHT
h°r I™owwq	hRq IRwvoRCd	h™Nq™R°ofCdm	hhlq I°ffovCdm	wfovqlhvv Cdm	h°oC0 E lfo™Rd™™C0 Lyo	RI□ I°hvv bSm
h™I™ofwdm	hfwq IRfoICdm	hRvq I™v™oRCd	I°ffovCdm	wfovqlhvv Cdm	h™oC0 E lh6°d™™wlC0 Lyo	N°□ I°™NlbSm
hRrIRo°vdm	°q IN°lo™Cdm	hNfq IR™ofCdm	hhlq I°ffovCdm	wfovqlhvv Cdm	hRoNC0 E lhohd™™f° C0 Lyo	Nw□ I°NR□bSm
hwrlRoIdm	°™°q INlfo™Cdm	h™qIRwRoICdm	hhlq I°ffovCdm	wfovqlhvv Cdm	hwolC0 E lh°ol™d™hRN™C0 Lyo	wR□ I°f™ bSm
hlr INoRfdm	°NwqlwN6Cdm	°q IN°NoICdm	hhlq I°ffovCdm	wfovqlhvv Cdm	hfoC0 E lhRoNId™hNC0 Lyo	v°□ I°™°wvSm
°hr lwoRd	°fq lvrhovCdm	°R™dwhvo°Cdm	hhlq I°ffovCdm	wfovqlhvv Cdm	°oNC0 E lhvo°d™hwC0 Lyo	IR□ I°™lh□bSm

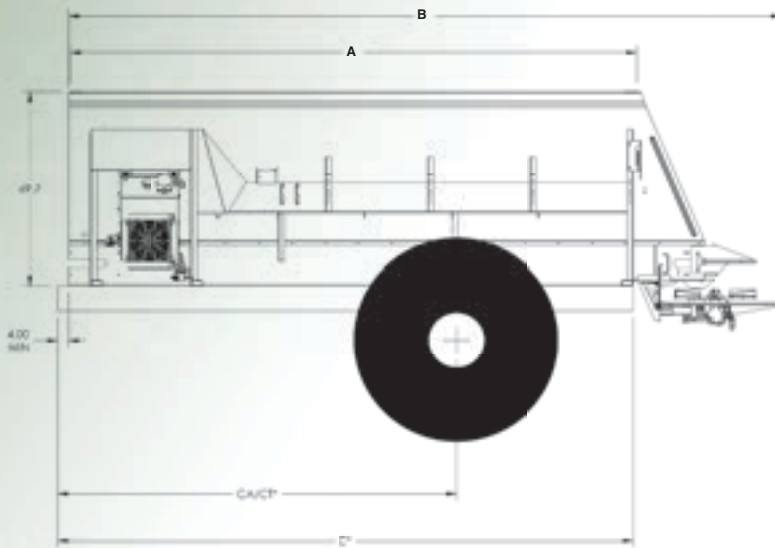

NOTE: CONSULT FEDERAL, STATE AND LOCAL WEIGHT LAWS AND CHASSIS MANUFACTURER'S RATINGS TO DETERMINE CAB TO AXLE (C/A) RATIO TO AVOID ICE MEASUREMENT. MAKE SURE GOVERNMENT WEIGHT RESTRICTIONS, GVWR AND GVW ARE NOT EXCEEDED.

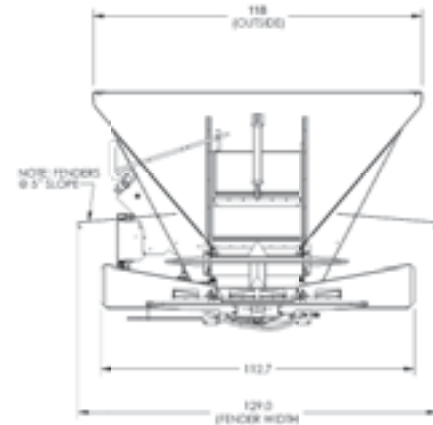

NEW LEADER

Building the best since 1939.

Highway Equipment Company

1330 76th Ave. SW • Cedar Rapids, IA 52404-7052

Phone: 319/363-8281 or 800/363-1771

FAX: 319/632-3081 or 800/363-8267

www.HighwayEquipment.com

Highway Equipment Company reserves the right to change products, specifications and design without notice. Photos and illustrations may or may not include optional equipment. New Leader is the trademark of Highway Equipment Company.

ecm 3 1 9 6 . 6 chdSeconBel

gigdcg hlgcg mng iggiig sdig igninglhc gigmoglsig igtdggldig lgctgnhg lgdeegisdg lgdtsglsig lggecgtdg lgxdng iidd lgidng esdl